



DOWEX MB-50

A Ready-for-use Regenerable Mixed Bed Resin for Production of High Quality Water in Lab & Industrial Applications.

Product	Resin ratio	Matrix	Functional group
DOWEX* MB-50	1:1 by volume cation:anion	Styrene-DVB, gel	Sulfonic acid Quaternary amine

Guaranteed Sales Specifications		OH ⁻ form	H ⁺ form
Total exchange capacity, min.	eq/l kgr/ft ³ as CaCO ₃	1.2 26.2	1.8 39.3
Water content	%	60 max.	50 - 56
Bead size distribution [†]			
0.3 mm - 1.2 mm, min.	%	90	90
Conversion (OH), min.	%	90	-
Cl, max.	%	1	-

Typical Physical and Chemical Properties		OH ⁻ form	H ⁺ form
Particle density	g/ml	1.08	1.22
Shipping weight	g/l lbs/ft ³	720 45	

Recommended Operating Conditions	
Maximum operating temperature:	60°C (140°F)
pH range	0-14
Bed depth, min.	800 mm (2.6 ft)
Flow rates:	
Service/fast rinse	5-50 m/h (2-20 gpm/ft ²)
Backwash	10-15 m/h (4-6 gpm/ft ²)
Regeneration/displacement rinse	2-10 m/h (0.8-4 gpm/ft ²)
Total rinse requirement	3-6 Bed volumes
Regenerant	1-8% H ₂ SO ₄ or 4-8% HCl and 4-8% NaOH
Operating capacity, typical	0.5 eq/l (11 kgr/ft ³ as Ca CO ₃)
Treated water quality, typical	
Conductivity	<0.2 µS/cm
Silica	20-30 ppb

[†]For additional particle size information, please refer to the Particle Size Distribution Cross Reference Chart (form no. 177-01775/CH 171-476-E).

^{††}Typical properties, not guaranteed sales specifications.

DOWEX

Ion Exchange Resins

For more information about DOWEX resins,
call Dow Liquid Separations business:

North America 1-800-447-4369
Latin America (+55) 11-5188-9277
Europe (+31) 20-691-6268
Japan (+81) 3-5460-2100
Australia (+61) 2-9776-3226
<http://www.dow.com/liquidseps>

Typical properties and applications:


DOWEX® MB-50 resin is a ready-to-use regenerable mixture of DOWEX HCR-S (H) cation exchange resin and DOWEX SBR LC NG (OH) anion exchange resin.

DOWEX MB-50 resin is used for production of high quality water for laboratory and industrial use.

Packaging

25 liter bags or 5 cubic feet fiber drums.

Figure 1. Pressure Drop Data

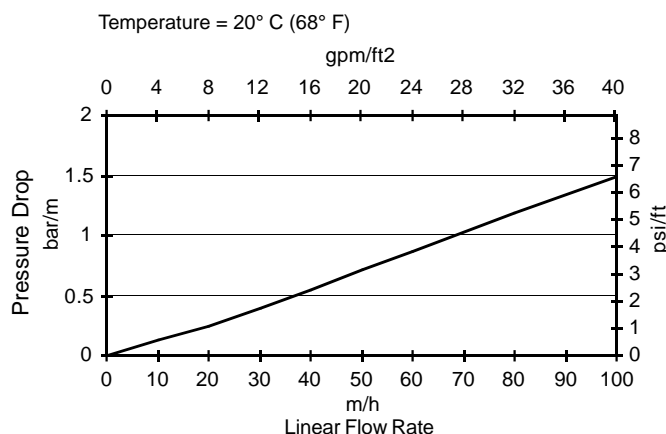

For other temperatures use:

$$P_T = P_{20^\circ\text{C}} / (0.026 T_{^\circ\text{C}} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68^\circ\text{F}} / (0.014 T_{^\circ\text{F}} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Published March 2000.



*Trademark of The Dow Chemical Company

Form No. 177-01633-300XQRP
CH 171-360-E-300R